

LSUDTH100 Straight Connector

Overview:

APPLICATIONS

APPLICATIONS

Joining long span cable tray

MATERIAL

Steel, hot-dip galv. the Sendzimir method
to PN-EN 10346:2011 (SG)


Available finishes:

F - steel, hot-dip galv.

to PN-EN ISO 1461:2011 (HDG)

E - stainless steel (SS), grade 1.4301 (AISI304)

L - powder coating in a full range of colours (PC)

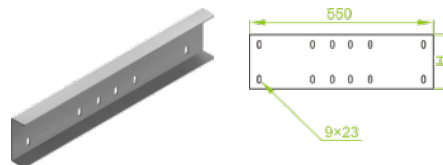

**Uniwersal Straight Connector for Long Span Cable Tray and Ladder Systems. Long Straight Connector LSUDT should be used in case of support spacing above 6m
For the assembly use 12 Screw Sets SGKM8x16**