

LLBJ...H80 Adjustable Vertical Bend

Overview:

Application

Diversions in cable routing. Full-range angle adjustment with a lock.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

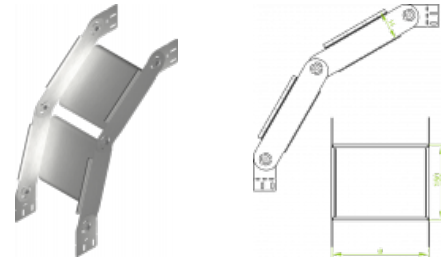

For installation use Screw Sets SGK M6×12 or SG M6×12.

Adjustable Vertical Bend is delivered fully assembled together with:

2 Adjustable Vertical Bend Elements

4 pairs of Angle Connectors


6 sets of screws







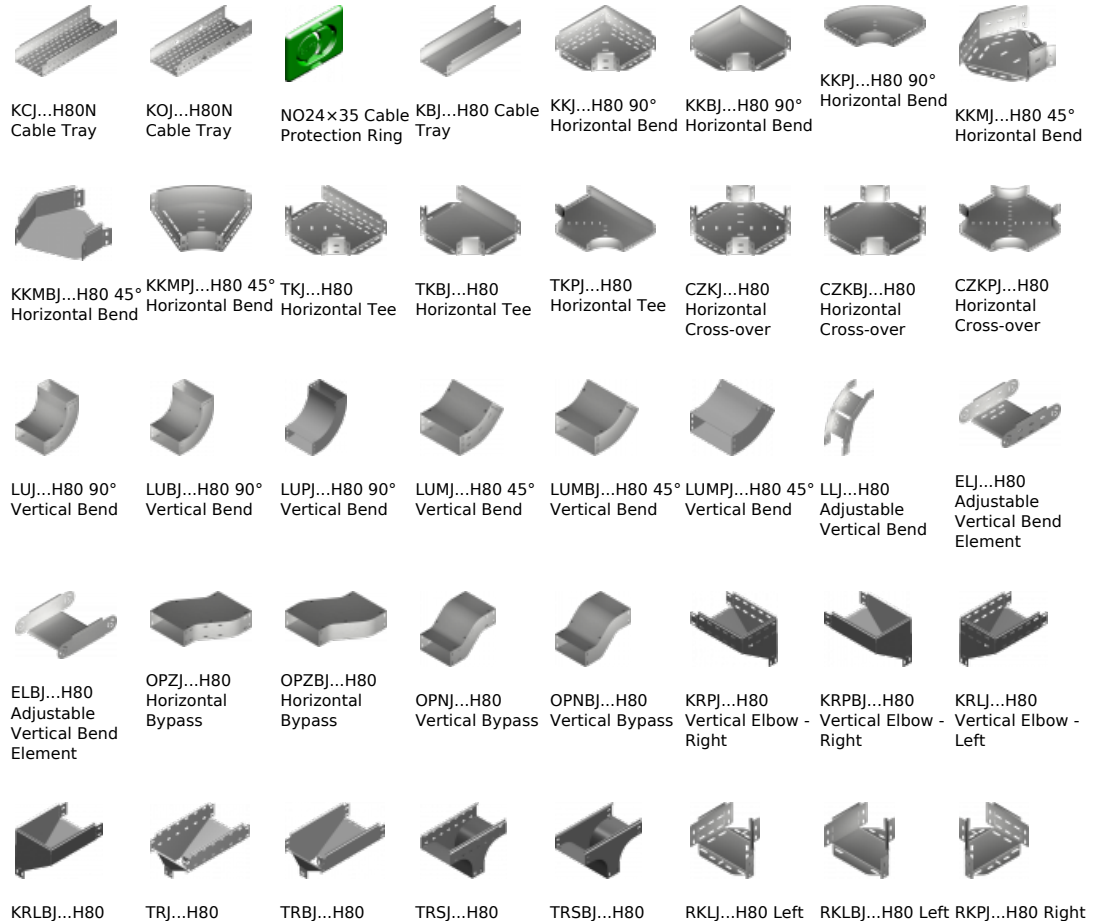

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLBJ100H80	100	187310	2	1,56
LLBJ150H80	150	187315	2	1,72
LLBJ200H80	200	187320	2	1,88
LLBJ300H80	300	187330	2	2,22
LLBJ400H80	400	187340	2	2,56
LLBJ500H80	500	187350	2	2,88
LLBJ600H80	600	187360	2	3,22

Connected products:



Vertical Elbow - Left	Vertical Tee -Lengthwise	Vertical Tee -Lengthwise	Vertical Tee - Crosswise	Vertical Tee - Crosswise	Reducer	Reducer	Reducer
							
RKPBJ...H80 Right Reducer	RKSJ...H80 Straight Reducer	RKSBJ...H80 Straight Reducer	LRJH80 Corner Connector	LRBJH80 Corner Connector	TKDJ...H80 Add-on Tee	LRPJH80 Corner Connector	