

## WWB... Bracket

### Overview:

#### APPLICATION

Suspending cable routes. Designed for assembly together with WPCB... Ceiling Bracket

#### MATERIAL

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).


Available to order:

F- steel, hot-dip galv.

to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS), grade 1.4301 (AISI304)

L- powder coating in a full range of colours (PC)

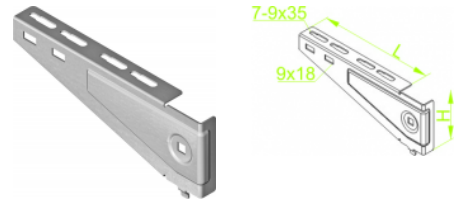

### Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
<b>WWB100</b>	<b>115</b>	<b>711710</b>	<b>10</b>	<b>80</b>	<b>0,20</b>	<b>1,20</b>
<b>WWB200</b>	<b>215</b>	<b>711720</b>	<b>10</b>	<b>90</b>	<b>0,40</b>	<b>1,40</b>
<b>WWB300</b>	<b>315</b>	<b>711730</b>	<b>10</b>	<b>115</b>	<b>0,75</b>	<b>1,90</b>
<b>WWB400</b>	<b>415</b>	<b>711740</b>	<b>10</b>	<b>115</b>	<b>1,20</b>	<b>1,80</b>