

ELBJ...H80 Adjustable Vertical Bend Element

Overview:

Application

Diversions in cable routing. Full-range angle adjustment with a lock.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

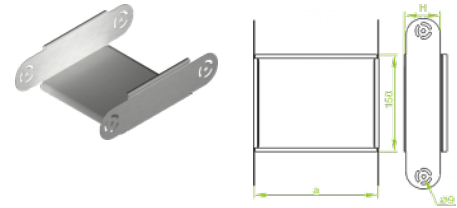

For installation use Screw Sets SGK M6×12 or SG M6×12.


Possibility of creating adjustable vertical bends of any internal radius through adding up bend elements

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ELBJ100H80	100	187510	4	0,48
ELBJ150H80	150	187515	4	0,56
ELBJ200H80	200	187520	4	0,64
ELBJ300H80	300	187530	4	0,81
ELBJ400H80	400	187540	4	0,98
ELBJ500H80	500	187550	4	1,14
ELBJ600H80	600	187560	4	1,31

Connected products:

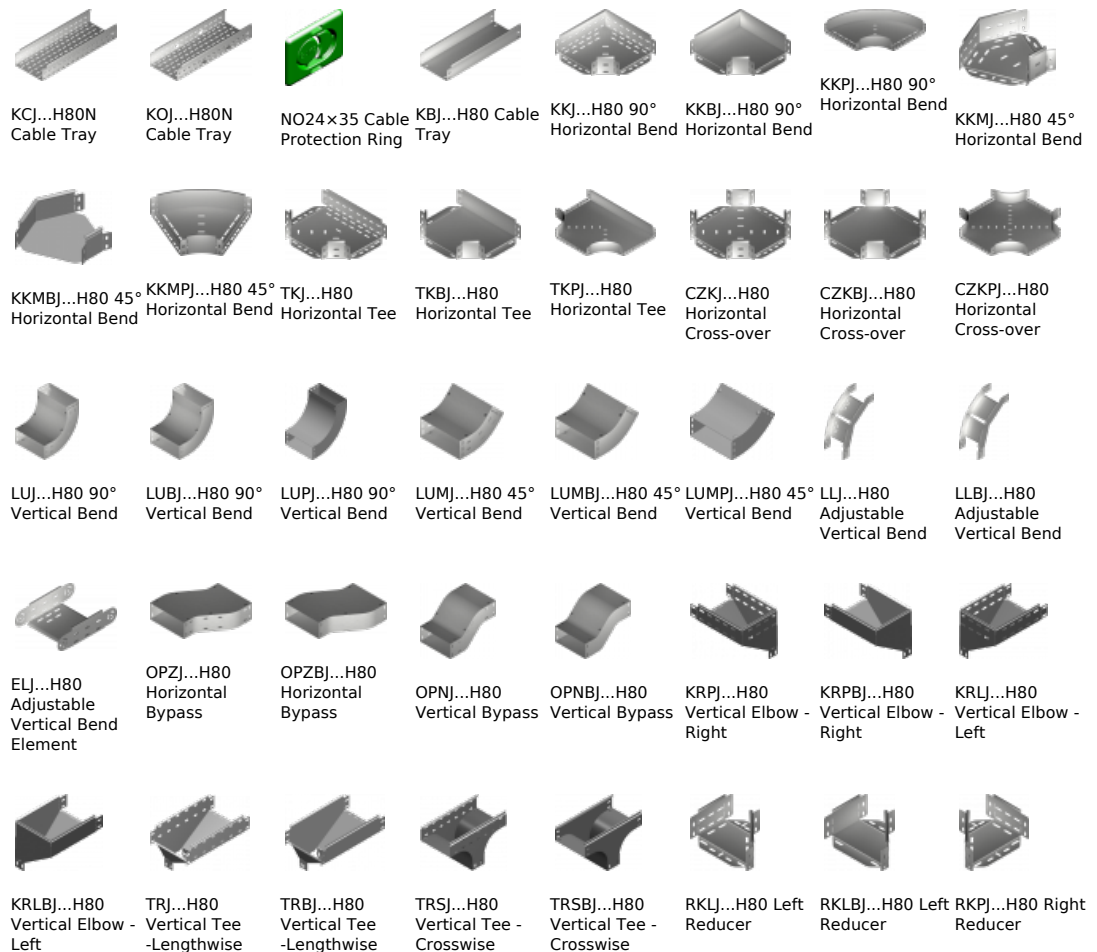

RKPBJ...H80
Right ReducerRKSJ...H80
Straight
ReducerRKSBJ...H80
Straight
ReducerLRJH80 Corner
ConnectorLRBJH80 Corner
ConnectorTKDJ...H80
Add-on TeeLRPJH80 Corner
Connector