


KGL/KGOL...H60 Cable Tray

Overview:

APPLICATION
Cable routing

MATERIAL
Steel, strip-galv. acc. to the
Sendzimir method PN-EN 10346:2011
Available finishes:
L- powder coating in a full range of colours (PC)

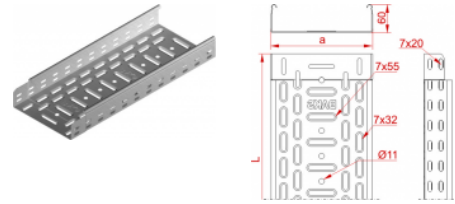

Connecting cable trays by sliding-in and screwing together

Max. safe load: 20 kg/m
Max. spacing of supports: 1.5m

Versions:

Sheet thickness: **0,7 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KGL/KGOL100H60/3	3000	100	160116	6	1,18
KGL/KGOL150H60/3	3000	150	160216	6	1,43
KGL/KGOL200H60/3	3000	200	160316	6	1,68
KGL/KGOL300H60/3	3000	300	160416	4	2,18