


## KGJ/KGOJ...H60 Cable Tray

### Overview:

**APPLICATION**  
Cable routing

**MATERIAL**  
Steel, strip-galv. acc. to the  
Sendzimir method PN-EN 10346:2011  
Available finishes:  
L- powder coating in a full range of colours (PC)

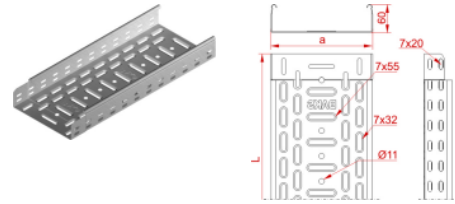

**Connecting cable trays by sliding-in and screwing together**

**Max. safe load: 20 kg/m**  
**Max. spacing of supports: 1.5m**

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KGJ/KGOJ100H60/3	3000	100	160816	6	1,63
KGJ/KGOJ150H60/3	3000	150	160916	6	1,98
KGJ/KGOJ200H60/3	3000	200	161016	6	2,28
KGJ/KGOJ300H60/3	3000	300	161116	6	2,96
KGJ/KGOJ400H60/3	3000	400	161216	4	3,65