


## KCL/KCOL...H60 Cable Tray

### Overview:

**APPLICATION**  
Cable routing

**MATERIAL**  
Steel, strip-galv. acc. to the  
Sendzimir method PN-EN 10346:2011  
Available finishes:  
L- powder coating in a full range of colours (PC)

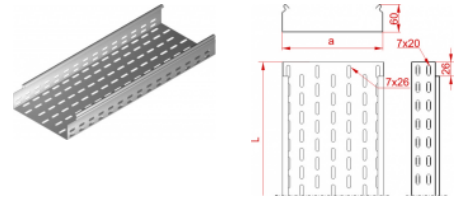

**Connecting cable trays by sliding-in and screwing together**

**Max. safe load: 20 kg/m**  
**Max. spacing of supports: 1.5m**

### Versions:

Sheet thickness: **0,7 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
<b>KCL/KCOL100H60/3</b>	<b>3000</b>	<b>100</b>	<b>160810</b>	<b>6</b>	<b>1,18</b>
<b>KCL/KCOL150H60/3</b>	<b>3000</b>	<b>150</b>	<b>160815</b>	<b>6</b>	<b>1,43</b>
<b>KCL/KCOL200H60/3</b>	<b>3000</b>	<b>200</b>	<b>160820</b>	<b>6</b>	<b>1,68</b>
<b>KCL/KCOL300H60/3</b>	<b>3000</b>	<b>300</b>	<b>160830</b>	<b>4</b>	<b>2,18</b>