


KCP/KCOP...H60 Cable Tray

Overview:

APPLICATION
 Cable routing

MATERIAL
 Steel, strip-galv. acc. to the
 Sendzimir method PN-EN 10346:2011
 Available finishes:
 L- powder coating in a full range of colours (PC)

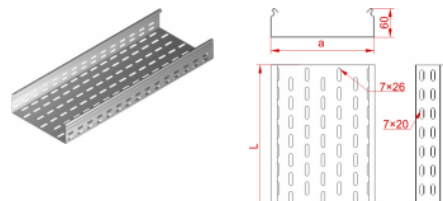

Connecting cable trays only with connectors

Max. safe load: 20 kg/m
Max. spacing of supports: 1.5m

Versions:

Sheet thickness: **1,5 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KCP/KCOP100H60/3	3000	100	161410	6	2,07
KCP/KCOP150H60/3	3000	150	161415	6	2,49
KCP/KCOP200H60/3	3000	200	161420	4	2,90
KCP/KCOP300H60/3	3000	300	161430	4	3,33
KCP/KCOP400H60/3	3000	400	160840	2	3,73
KCP/KCOP500H60/3	3000	500	160850	2	6,48
KCP/KCOP600H60/3	3000	600	160860	2	7,47