


KBJ...H60 Cable Tray

Overview:

APPLICATION
 Cable routing

MATERIAL
 Steel, strip-galv. acc. to the
 Sendzimir method PN-EN 10346:2011
 Available finishes:
 L- powder coating in a full range of colours (PC)

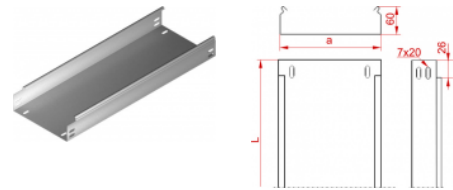

Connecting cable trays by sliding-in and screwing together

Max. safe load: 20 kg/m
Max. spacing of supports: 1.5m

Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KBJ100H60/3	3000	100	162210	6	2,00
KBJ150H60/3	3000	150	162215	6	2,40
KBJ200H60/3	3000	200	162220	6	2,80
KBJ300H60/3	3000	300	162230	4	3,60
KBJ400H60/3	3000	400	161640	2	4,40