


## KCL/KCOL...H60E Cable Tray

### Overview:

**APPLICATION**  
Cable routing

**MATERIAL**  
Stainless steel, grade 1.4301 (AISI304)  
Available finishes:  
L- powder coating in a full range of colours (PC)

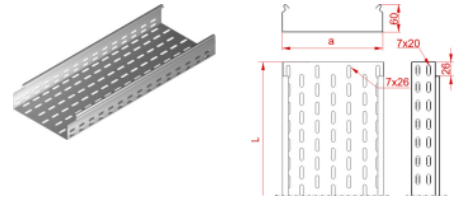

**Connecting cable trays by sliding-in and screwing together**

**Max. safe load: 20 kg/m**  
**Max. spacing of supports: 1.5m**

### Versions:

Sheet thickness: **0,7 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KCL/KCOL100H60/ 3E	3000	100	867911	6	1,18
KCL/KCOL150H60/ 3E	3000	150	861916	6	1,43
KCL/KCOL200H60/ 3E	3000	200	861921	6	1,68
KCL/KCOL300H60/ 3E	3000	300	961931	4	2,18