


KCD/KCOD...H60E Cable Tray

Overview:

APPLICATION
Cable routing

MATERIAL
Stainless steel, grade 1.4301 (AISI304)
Available finishes:
L- powder coating in a full range of colours (PC)

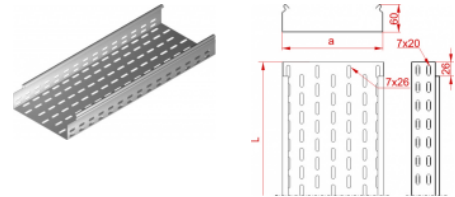

Connecting cable trays by sliding-in and screwing together

Max. safe load: 20 kg/m
Max. spacing of supports: 1.5m

Versions:

Sheet thickness: **1,2 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KCD/KCOD100H60/ 3E	3000	100	861912	6	2,07
KCD/KCOD150H60/ 3E	3000	150	861917	6	2,49
KCD/KCOD200H60/ 3E	3000	200	861922	4	2,90
KCD/KCOD300H60/ 3E	3000	300	861932	4	3,33
KCD/KCOD400H60/ 3E	3000	400	861933	2	3,73