

## KCL/KCOL...H60F Cable Tray


### Overview:

**APPLICATION**

Cable routing

**MATERIAL**

Steel, hot-dip galvanised  
to PN-EN ISO 1461:2011 (HDG)  
Available finishes:  
L- powder coating in a full range of colours (PC)

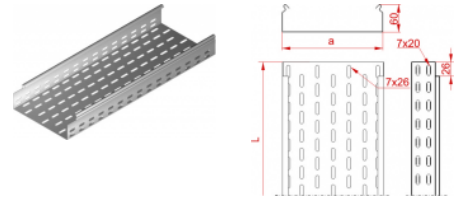

**Connecting cable trays by sliding-in and screwing together**

**Max. safe load: 20 kg/m**

**Max. spacing of supports: 1.5m**

### Versions:

Sheet thickness: **0,7 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
<b>KCL/KCOL150H60/3F</b>	<b>3000</b>	<b>150</b>	<b>169516</b>	<b>6</b>	<b>1,43</b>
<b>KCL/KCOL200H60/3F</b>	<b>3000</b>	<b>200</b>	<b>169521</b>	<b>6</b>	<b>1,68</b>
<b>KCL/KCOL300H60/3F</b>	<b>3000</b>	<b>300</b>	<b>169531</b>	<b>4</b>	<b>2,18</b>