

KCJ/KCOJ...H60F Cable Tray


Overview:

APPLICATION

Cable routing

MATERIAL

Steel, hot-dip galvanised
to PN-EN ISO 1461:2011 (HDG)
Available finishes:
L- powder coating in a full range of colours (PC)

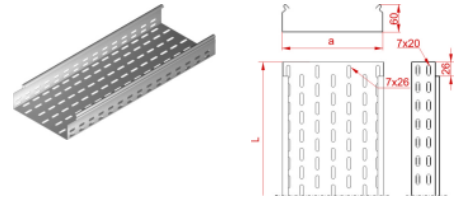

Connecting cable trays by sliding-in and screwing together

Max. safe load: 20 kg/m

Max. spacing of supports: 1.5m

Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KCJ/KCOJ100H60/3F	3000	100	169611	6	1,63
KCJ/KCOJ150H60/3F	3000	150	169616	6	1,98
KCJ/KCOJ200H60/3F	3000	200	169621	6	2,28
KCJ/KCOJ300H60/3F	3000	300	169631	6	2,96
KCJ/KCOJ400H60/3F	3000	400	169641	4	3,65