


KCD/KCOD...H60F Cable Tray

Overview:

APPLICATION
 Cable routing

MATERIAL
 Steel, hot-dip galvanised
 to PN-EN ISO 1461:2011 (HDG)
 Available finishes:
 L- powder coating in a full range of colours (PC)

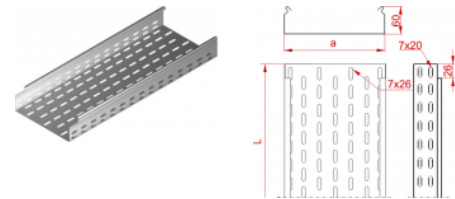

Connecting cable trays by sliding-in and screwing together

Max. safe load: 20 kg/m
Max. spacing of supports: 1.5m

Versions:

Sheet thickness: **1,2 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KCD/KCOD100H60/3F	3000	100	169111	6	2,07
KCD/KCOD150H60/3F	3000	150	169114	6	2,49
KCD/KCOD200H60/3F	3000	200	169121	4	2,90
KCD/KCOD300H60/3F	3000	300	169131	4	3,33
KCD/KCOD400H60/3F	3000	400	169141	2	3,73