

## TKBJ...H60 Horizontal Tee


### Overview:

#### APPLICATION

Branching out cable runs

#### MATERIAL

Steel, strip-galv. acc. to the  
Sendzimir method PN-EN 10346:2011  
Available finishes:  
F - steel, hot-dip galvanised  
to PN-EN ISO 1461:2011 (HDG)  
E - stainless steel, grade 1.4301 (AISI304)  
L - powder coating in a full range of colours (PC)

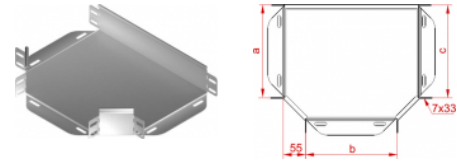

#### For the assembly use:

- Width 100÷200 - min. 15 sets of Screw
- Width 300÷400 - min. 18 sets of Screw
- Width 500÷600 - min. 21 sets of Screw SGKM6x12

### Versions:

Sheet thickness: 1,0 mm

| Symbol     | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|------------|--------------|------------------|-----------------|--------------|
| TKBJ100H60 | 100          | 160901           | 20              | 0,45         |
| TKBJ150H60 | 150          | 161001           | 10              | 0,64         |
| TKBJ200H60 | 200          | 161101           | 10              | 0,90         |
| TKBJ300H60 | 300          | 161301           | 10              | 1,49         |
| TKBJ400H60 | 400          | 161401           | 10              | 2,26         |