

LLBJ...H60 Adjustable Vertical Bend


Overview:

APPLICATION

Diversions in cable routing.
Full-range angle adjustment with a lock.

MATERIAL

Steel, strip-galv. acc. to the
Sendzimir method PN-EN 10346:2011
Available finishes:
F - steel, hot-dip galvanised
to PN-EN ISO 1461:2011 (HDG)
E - stainless steel, grade 1.4301 (AISI304)
L - powder coating in a full range of colours (PC)

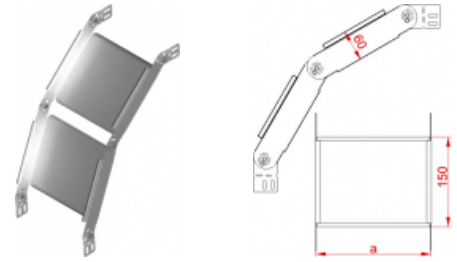

For the assembly use min. 8 sets of Screw SGKM6x12

Versions:

Sheet thickness: **1,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|------------|--------------|------------------|-----------------|--------------|
| LLBJ100H60 | 100 | 162501 | 2 | 1,32 |
| LLBJ150H60 | 150 | 162601 | 2 | 1,50 |
| LLBJ200H60 | 200 | 162701 | 2 | 1,60 |
| LLBJ300H60 | 300 | 162901 | 2 | 1,98 |
| LLBJ400H60 | 400 | 163001 | 2 | 2,32 |