


PKL... Cover

Overview:

APPLICATION

Eliminating the risk of mechanical damage to cables. Improving overall aesthetic appearance of cable runs

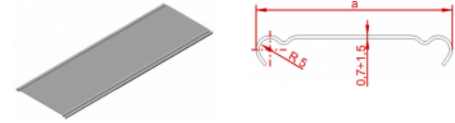

MATERIAL

Steel, strip-galv. acc. to the
Sendzimir method PN-EN 10346:2011
Available finishes:
F- steel, hot-dip galvanised
to PN-EN ISO 1461:2011 (HDG)
up to 1.0mm thickness
E- stainless steel, grade 1.4301 (AISI304)
up to 1.2mm thickness
L- powder coating in a full range of colours (PC)

Versions:

Sheet thickness: **0,7 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
PKL100/3	3000	100	100610	10	0,72
PKL150/3	3000	150	100615	6	1,02
PKL200/3	3000	200	100620	6	1,32
PKL300/3	3000	300	100630	4	1,92