


## PKD... Cover

### Overview:

#### APPLICATION

Eliminating the risk of mechanical damage to cables. Improving overall aesthetic appearance of cable runs

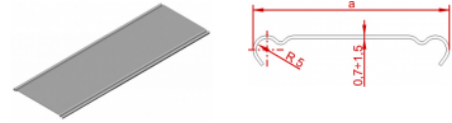

#### MATERIAL

Steel, strip-galv. acc. to the Sendzimir method PN-EN 10346:2011  
Available finishes:  
F- steel, hot-dip galvanised to PN-EN ISO 1461:2011 (HDG) up to 1.0mm thickness  
E- stainless steel, grade 1.4301 (AISI304) up to 1.2mm thickness  
L- powder coating in a full range of colours (PC)

### Versions:

Sheet thickness: **1,2 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
<b>PKD100/3</b>	<b>3000</b>	<b>100</b>	<b>101010</b>	<b>6</b>	<b>1,30</b>
<b>PKD150/3</b>	<b>3000</b>	<b>150</b>	<b>101015</b>	<b>6</b>	<b>1,80</b>
<b>PKD200/3</b>	<b>3000</b>	<b>200</b>	<b>101020</b>	<b>4</b>	<b>2,30</b>
<b>PKD300/3</b>	<b>3000</b>	<b>300</b>	<b>101030</b>	<b>4</b>	<b>3,30</b>
<b>PKD400/3</b>	<b>3000</b>	<b>400</b>	<b>100840</b>	<b>4</b>	<b>4,30</b>