


## DUP/DUOP...H60E Cable Ladder

### Overview:

**APPLICATION**  
Cable routing

**MATERIAL**  
Stainless steel, grade 1.4301 (AISI304)  
Available finishes:  
L- powder coating in a full range of colours (PC)

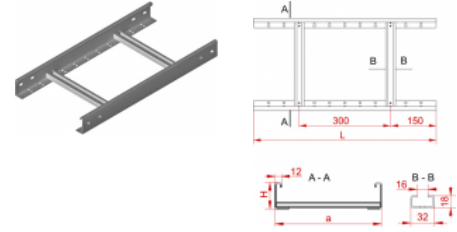

- For assembly use 2 pcs of Straight connectors LDC/LDOCH60 and 8 sets of screw SGKM8x14
- For vertical direction change use 2 pcs of Articulated Connector LGC/LGOCH60 and 8 sets of screw SGKM8x14
- For horizontal direction change use 2 pcs of Angle Connector LKD/LKDOCH60 and 8 sets of screw SGKM8x14

**Max. safe load: 20 kg/m**  
**Max. spacing of supports: 1.5m**

Sheet thickness: **1,5 mm**

### Versions:

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
DUP/DUOP100H60/3E	3000	100	466311	2	2,41
DUP/DUOP200H60/3E	3000	200	466321	2	2,69
DUP/DUOP300H60/3E	3000	300	466331	2	2,97
DUP/DUOP400H60/3E	3000	400	466341	2	3,38