

## LPDZP/LPDZOP...H60 90° Vertical Bend - External


### Overview:

#### APPLICATION

Diversion in cable routing.

#### MATERIAL

Steel, strip-galv. acc. to the  
 Sendzimir method PN-EN 10346:2011  
 Available finishes:  
 F - steel, hot-dip galvanised  
 to PN-EN ISO 1461:2011 (HDG)  
 E - stainless steel, grade 1.4301 (AISI304)  
 L - powder coating in a full range of colours (PC)

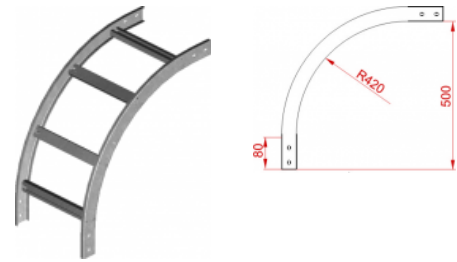

**For assembly use 4 pcs of Straight connectors  
 LDC/LDOCH60  
 and 16 sets of screw SGK8x14**

### Versions:

Sheet thickness: **1,5 mm**

| Symbol             | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|--------------------|--------------|------------------|-----------------|--------------|
| LPDZP/LPDZOP100H60 | 100          | 469010           | 1               | 1,90         |
| LPDZP/LPDZOP200H60 | 200          | 469020           | 1               | 2,26         |
| LPDZP/LPDZOP300H60 | 300          | 469030           | 1               | 2,66         |
| LPDZP/LPDZOP400H60 | 400          | 469040           | 1               | 3,02         |
| LPDZP/LPDZOP500H60 | 500          | 469050           | 1               | 3,42         |
| LPDZP/LPDZOP600H60 | 600          | 469060           | 1               | 3,82         |