

LPDP...H60N Adjustable Vertical Bend


Overview:

APPLICATION

Diversion in cable routing.

MATERIAL

Steel, strip-galv. acc. to the
 Sendzimir method PN-EN 10346:2011
 Available finishes:
 F - steel, hot-dip galvanised
 to PN-EN ISO 1461:2011 (HDG)
 E - stainless steel, grade 1.4301 (AISI304)
 L - powder coating in a full range of colours (PC)

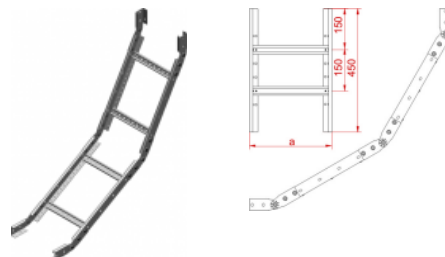

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDP100H60	100	467610	2	4,60
LPDP200H60	200	467620	2	4,97
LPDP300H60	300	467630	2	5,36
LPDP400H60	400	467640	2	5,93
LPDP500H60	500	467650	2	6,11
LPDP600H60	600	467660	2	6,51