

BR... Spacer


Overview:

APPLICATION

Used as spacer protecting against crushing steel profile during installation. Used with channel and Z-Profile.

MATERIAL

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).
Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC)

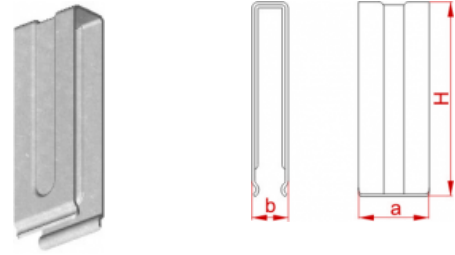

We recommend using spacers BR... when screwing up Head plates with steel profiles. Spacer BR... Protects against crushing channel or z - profiles During installation.

Versions:

Symbol	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Size b [mm]
BR40	35	700100	50	100	15
BR55	42	700300	50	140	15