


KLL75H60L Painted Cable Tray

Overview:

APPLICATIONS
Installation of light systems.

MATERIAL
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).
Powder coated only on outside to RAL9010
On request:
powder painting in standard RAL color
(info page 2)

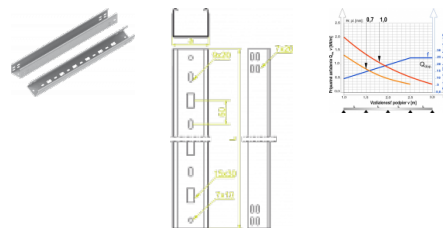

Versions:

Sheet thickness: **0,7 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
KLL75H60/3L	3000	75	160507	4	60	1,12
KLL75H60/6L	6000	75	163007	4	60	1,12