

KLWL75H60 Cable Tray

Overview:

APPLICATIONS

Installation of light systems.

MATERIAL


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).

Available finishes:

F - steel, hot-dip galv. to

PN-EN ISO 1461:2011 (HDG)

E - stainless steel (SS), grade 1.4301 (AISI304), (only 3m)

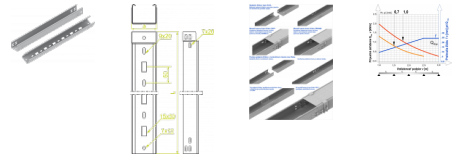

Possibility of joining cable tray sections together through sliding one into another and connector-free assembly. For installation use Screw Sets SGKM6x12 or SGM6x12.

IMPORTANT!

Production is possible only for big orders.

Versions:

Sheet thickness: **0,7 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
KLWL75H60/3	3000	75	164007	4	60	1,12
KLWL75H60/6	6000	75	164107	4	60	1,12