

KLWL75H60L Painted Cable Tray


Overview:

APPLICATIONS
Installation of light systems.

MATERIAL
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).
Powder coated only on outside to RAL9010
On request:
powder painting in standard RAL color (info page 2)

Possibility of joining cable tray sections together through sliding one into another and connector-free assembly. For installation use Screw Sets SGKM6x12 or SGM6x12.

IMPORTANT!
Production is possible only for big orders.

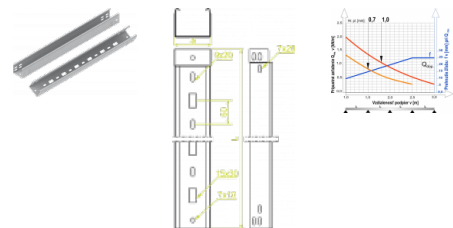

Versions:

Sheet thickness: 0,7 mm

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
KLWL75H60/3L	3000	75	164207	4	60	1,12
KLWL75H60/6L	6000	75	164307	4	60	1,12