

LPLH60 Straight Connector

Overview:

APPLICATIONS

Connecting cable routes.

MATERIAL

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).


Available finishes:

F - steel, hot-dip galv. to

PN-EN ISO 1461:2011 (HDG)

E - stainless steel (SS), grade 1.4301 (AISI304),

L - powder painting in standard RAL color

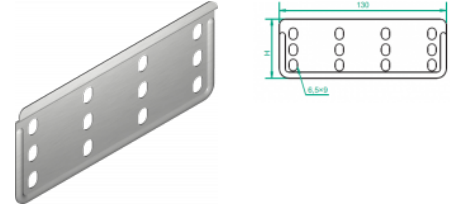

For the assembly use min. 4 sets of Screw Sets SGKM6x12 or SGM6x12

Apply Straight Connectors LPL and LPP for sturdy and firm tray joint