

LUMJ...H80 45° Vertical Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

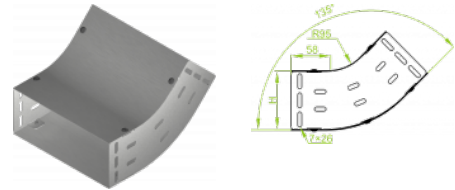


For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUMJ100H80	100	183110	2	0,96
LUMJ150H80	150	183115	2	1,20
LUMJ200H80	200	183120	2	1,45
LUMJ300H80	300	183130	2	1,93
LUMJ400H80	400	183140	2	2,42
LUMJ500H80	500	183150	2	2,90
LUMJ600H80	600	183160	2	3,38

Connected products:

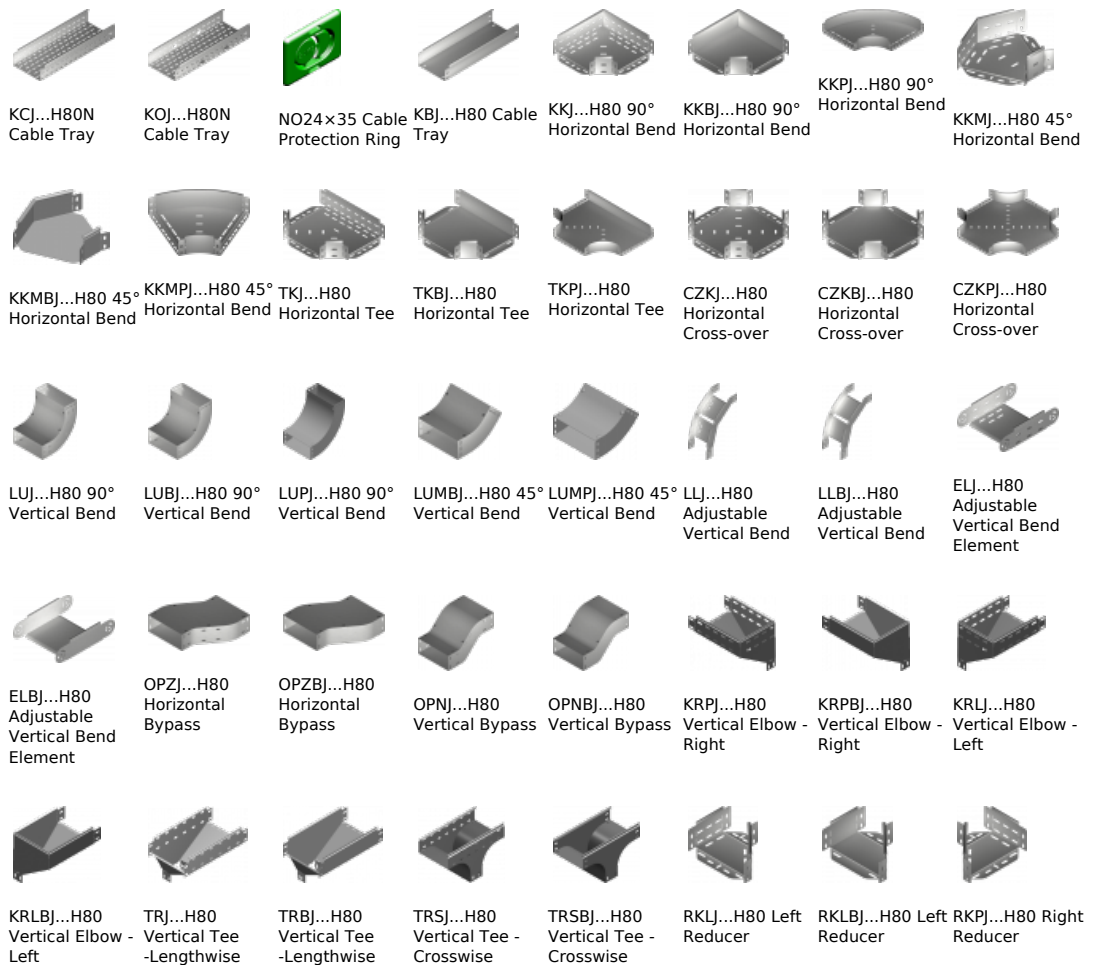

RKPBJ...H80
Right ReducerRKSJ...H80
Straight
ReducerRKSBJ...H80
Straight
ReducerLRJH80 Corner
ConnectorLRBJH80 Corner
ConnectorTKDJ...H80
Add-on TeeLRPJH80 Corner
Connector