

POPZZC Cover For Horizontal Bypass - Right H50, H100

Overview:

APPLICATION

Protecting cables against damage. Tight cover protection against accumulation of dirt and dust.

Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)


Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

Note:

In every cover are pre-punched holes, necessary for dipping-in melted zinc (ref. hot-dip galvanizing process)

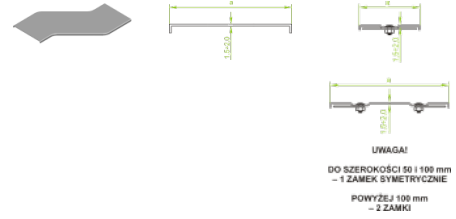

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
POPZZC 50	50	306105	20	0,34
POPZZC100	100	306110	20	0,67
POPZZC200	200	306120	10	1,21
POPZZC300	300	306130	10	1,74
POPZZC400	400	306140	4	2,27
POPZZC500	500	306150	4	2,80
POPZZC600	600	306160	4	3,33