

PZOLZZC Cover For Horizontal Bypass - Left H50, H100

Overview:

APPLICATION

Protecting cables against damage. Tight cover protection against accumulation of dirt and dust.

Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

Note:


In every cover are pre-punched holes, necessary for dipping-in melted zinc (ref. hot-dip galvanizing process)

Cover with a lock

NOTE: UP TO 50 and 100mm WIDE - 1 LOCK -

SYMMETRICALLY

OVER 100mm WIDE - 2 LOCKS

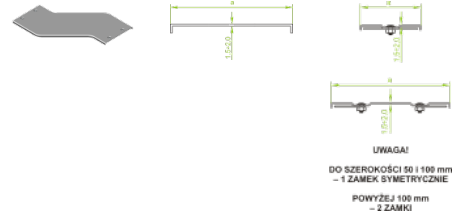

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
PZOLZZC 50	50	316305	20	0,34
PZOLZZC100	100	316310	20	0,67
PZOLZZC200	200	316320	10	1,21
PZOLZZC300	300	316330	10	1,74
PZOLZZC400	400	316340	4	2,27
PZOLZZC500	500	316350	4	2,80
PZOLZZC600	600	316360	4	3,33