

WPMC Bracket

Overview:

APPLICATIONS

Supporting cable trays.

MATERIAL:

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).


Available finishes:

F - steel, hot-dip galv. to

PN-EN ISO 1461:2011 (HDG)

E - stainless steel (SS), grade 1.4301 (AISI304)

L - powder painting in standard RAL color

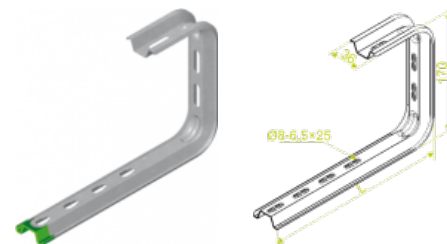

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.	Maximum load F _{max} [kN]
WPMC50	108	720312	20	0,22	0,40
WPMC100	158	720311	20	0,26	0,35
WPMC150	208	720316	20	0,30	0,30
WPMC200	258	720321	20	0,33	0,25