


WFML Bracket

Overview:

APPLICATIONS
Supporting cable trays.

MATERIAL:
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).
Available finishes:
F - steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E - stainless steel (SS), grade 1.4301 (AISI304)
L - powder painting in standard RAL color

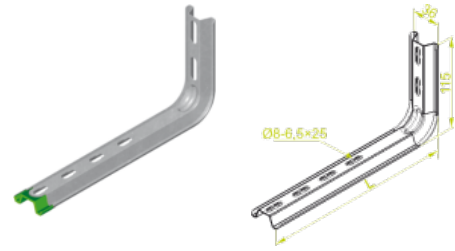

In installation the application of Spacer PD9

IMPORTANT! Non-standard lengths of brackets available to special order

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.	Maximum load Fmax[kN]
WFML50	108	720112	30	0,13	0,45
WFML100	158	720111	30	0,16	0,40
WFML150	208	720116	30	0,19	0,35
WFML200	258	720121	30	0,22	0,30