

LLBJ...H30 Adjustable Vertical Bend

Overview:

Application

Diversions in cable routing. Full-range angle adjustment with a lock.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

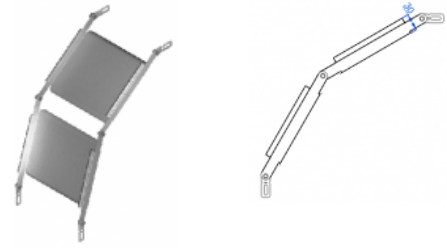

For installation use Screw Sets SGK M6×10 or SG M6×10.

Adjustable Vertical Bend is delivered fully assembled together with:

2 Adjustable Vertical Bend Elements

4 pairs of Angle Connectors


6 sets of screws

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLBJ50H30	50	136105	2	0,55
LLBJ100H30	100	136110	2	0,73
LLBJ150H30	150	136115	2	0,89
LLBJ200H30	200	136120	2	1,05
LLBJ300H30	300	136130	2	1,39

Connected products:

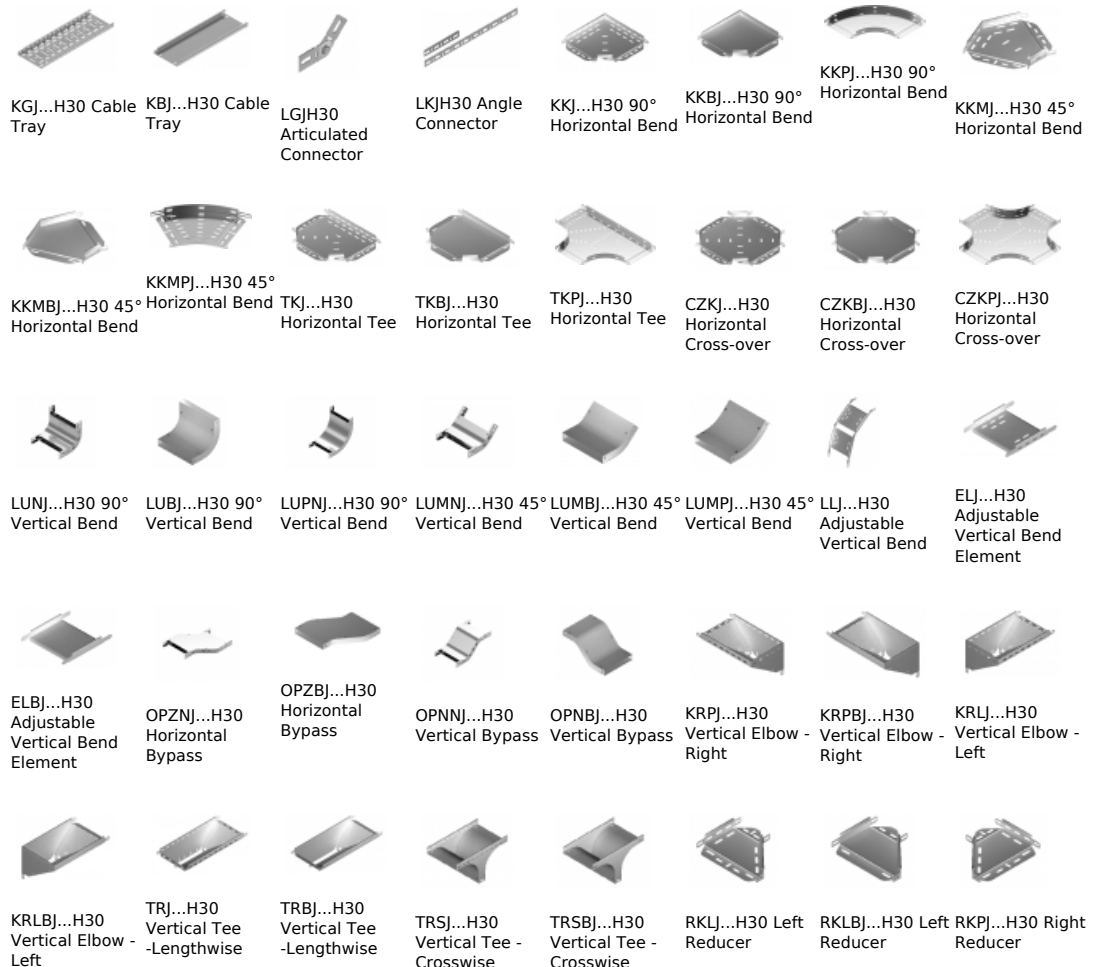

RKPBJ...H30
Right ReducerRKSJ...H30
Straight
ReducerRKSBJ...H30
Straight
ReducerLRJH30 Corner
ConnectorLRBJH30 Corner
ConnectorTKDJ...H30
Add-on TeeLRPJH30 Corner
Connector