

LKFJH60 Connector

Overview:

Application

Connecting cable routes.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

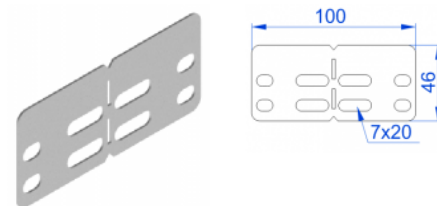

The connectors are used to join fittings without integrated connectors

(e.g. bypass) with Cable Trays KF... (suitable for click ends of Cable

Trays KF...) or standard length Cable Trays KF... with another

cut-to-length tray. For the assembly use at least 4 Screw Sets

SGKM6x12 or SGM6x12.