

KKMPJ...H80 45° Horizontal Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

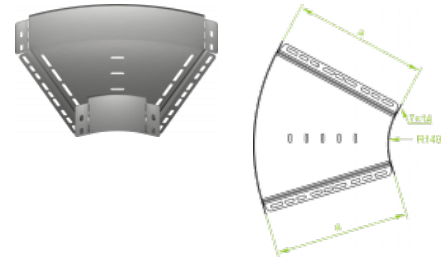


For installation use Screw Sets SGK M6×12 or SG M6×12.

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMPJ100H80	100	181514	16	0,40
KKMPJ150H80	150	181614	10	0,53
KKMPJ200H80	200	181714	10	0,67
KKMPJ300H80	300	181814	4	1,00
KKMPJ400H80	400	181914	4	1,38
KKMPJ500H80	500	182014	2	1,83
KKMPJ600H80	600	182114	2	2,34

Connected products:

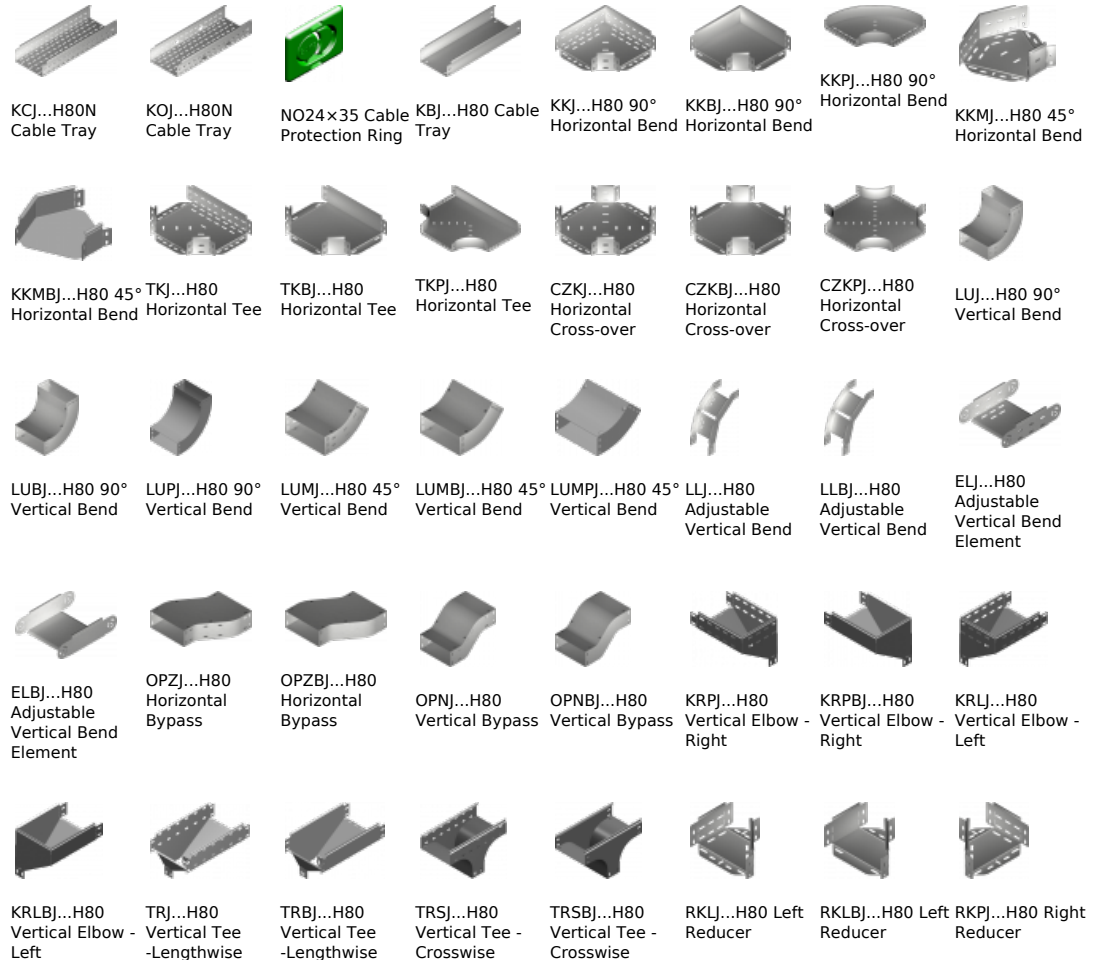

RKPBJ...H80
Right ReducerRKSJ...H80
Straight
ReducerRKSBJ...H80
Straight
ReducerLRJH80 Corner
ConnectorLRBJH80 Corner
ConnectorTKDJ...H80
Add-on TeeLRPJH80 Corner
Connector