

KCL...H100N Cable Tray

Overview:


Application
Cable routing

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

Important! Possibility of joining cable tray sections together through sliding one into another and connectorfree assembly.

Available when ordering in large quantity are 2m and 6m long tray sections. To install cable tray use Screw Sets SGK M6x12 or SG M6x12.

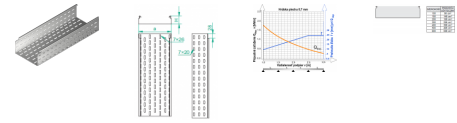

Versions:

Sheet thickness: **0,7 mm**

| Symbol | Length L [m] | Width a [mm] | Catalogue number | Quantity in box | Weight [1m] | Effective section |
|----------------------|--------------|--------------|------------------|-----------------|-------------|-------------------|
| KCL100H100/3N | 3000 | 100 | 110210 | 4 | 1,56 | 9800 |
| KCL200H100/3N | 3000 | 200 | 110220 | 4 | 2,08 | 19800 |
| KCL300H100/3N | 3000 | 300 | 110230 | 2 | 2,57 | 29800 |

Connected products:



KGL...H100 Cable Tray



NO24x35 Cable Protection Ring



KBL...H100 Cable Tray



LPLH100 Straight Connector