

KOJ...H100N Cable Tray


Overview:

Application
Cable routing

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

Important! Possibility of joining cable tray sections together through sliding one into another and connector-free assembly. Available when ordering in large quantity are 2m long tray sections. To install cable tray use Screw Sets SGK M6x12 or SG M6x12.




Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KOJ100H100/3N	3000	100	111010	4	2,16	9800
KOJ150H100/3N	3000	150	111015	4	2,49	14800
KOJ200H100/3N	3000	200	111020	4	2,82	19800
KOJ300H100/3N	3000	300	111030	2	3,47	29800
KOJ400H100/3N	3000	400	111040	2	4,13	39800
KOJ500H100/3N	3000	500	111050	2	4,79	49800
KOJ600H100/3N	3000	600	111060	2	5,44	59800

Connected products:

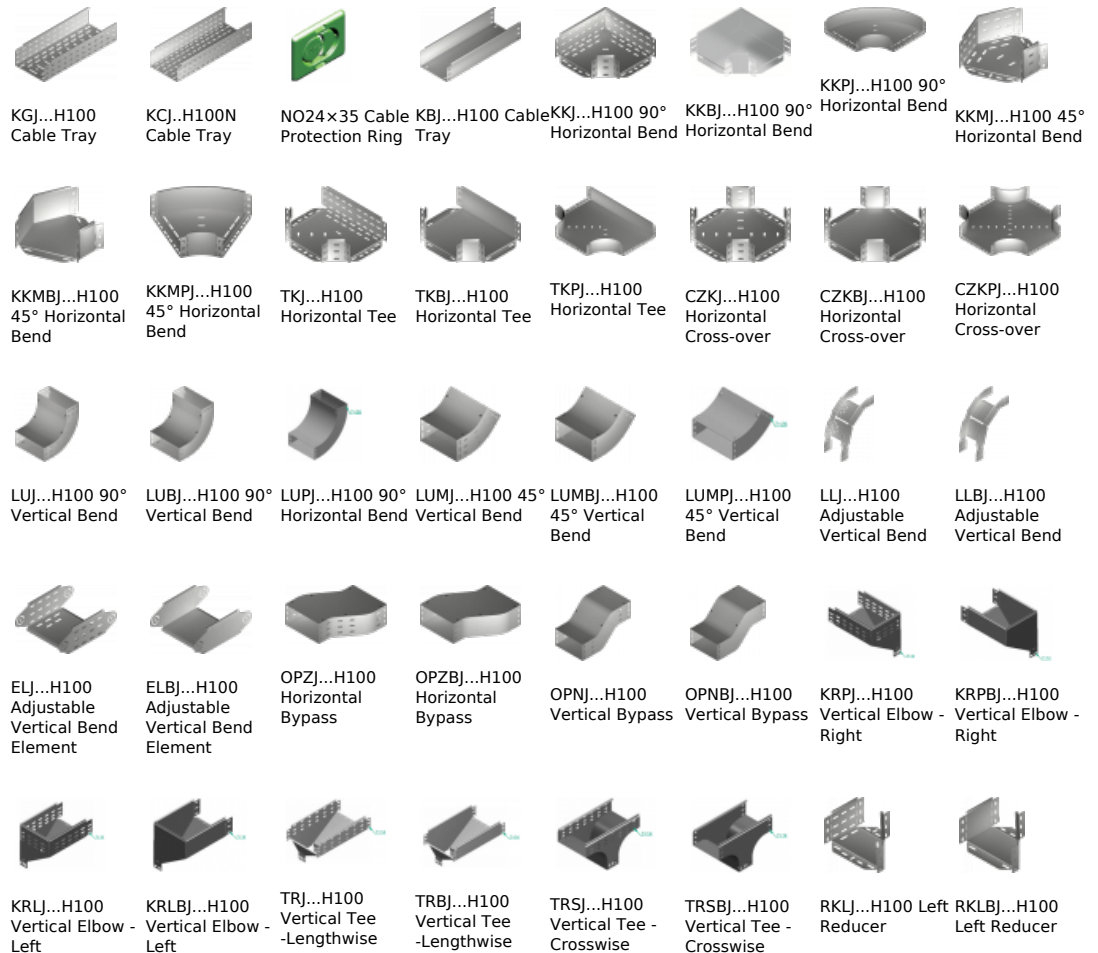

RKPJ...H100
Right ReducerRKPBJ...H100
Right ReducerRKSJ...H100
Straight
ReducerRKSBJ...H100
Straight
ReducerLRJH100 Corner
ConnectorLRBJH100
Corner
ConnectorTKDJ...H100
Add-on TeeLRPJH100
Corner
Connector