

PKKML... Cover For 45° Horizontal Bend

Overview:

Application

Protecting cables against damage. Used in heavy dust indoor conditions.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

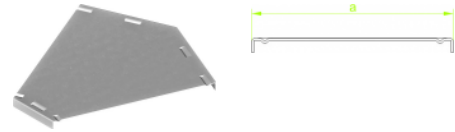

NOTE: To attach covers without locks to non-perforated fittings

use Clamp ZPD. With perforated fittings Clamp ZPNH... should be applied

IMPORTANT! Covers with locks for fittings available to order

Versions:

Sheet thickness: **0,7 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
PKKML50	50	102605	20	0,05
PKKML100	100	102610	20	0,08
PKKML150	150	102615	20	0,15
PKKML200	200	102620	20	0,24
PKKML300	300	102630	10	0,48
PKKML400	400	102640	10	0,80
PKKML500	500	102650	10	1,20
PKKML600	600	102660	10	1,66

Connected products:

