

PZKD... Cover

Overview:

Application

Protecting cables against damage. Used in heavy dust indoor conditions

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG) for 1mm thick min

E- stainless steel (SS) to 1.2mm thick max.

L- powder coating in a full range of colours (PC)

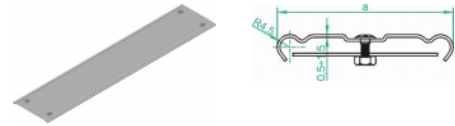

Cover with a lock

Important! Made to order covers are 2m long. Covers PKP and PZKP

are not manufactured from stainless steel (SS).

NOTE:

Up to 100mm WIDE - 1 LOCK - SYMMETRICALLY
OVER 100mm WIDE - 2 LOCKS

Versions:

Sheet thickness: **1,2 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
PZKD50/3	3000	50	102005	6	0,85
PZKD100/3	3000	100	102010	6	1,35
PZKD150/3	3000	150	102015	6	1,85
PZKD200/3	3000	200	102020	4	2,35
PZKD300/3	3000	300	102030	4	3,35
PZKD400/3	3000	400	101640	4	4,35
PZKD500/3	3000	500	101650	2	5,35
PZKD600/3	3000	600	101660	2	6,35

Connected products:

