

LWKSC...H100N 90° Vertical Bend - Internal

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)


L- powder coating in a full range of colours (PC)

For joining fittings to cable tray use Straight Connectors for Fittings

LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.

FEATURES & BENEFITS:

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

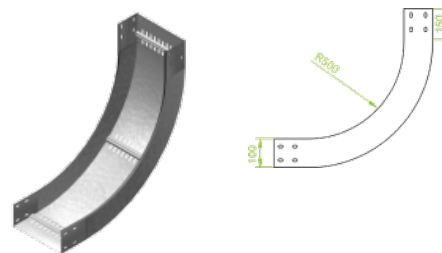

Versions:

Sheet thickness: 2,0 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LWKSC200H100N	200	221122	2	7,03
LWKSC300H100N	300	221132	2	8,04
LWKSC400H100N	400	221142	2	9,02
LWKSC500H100N	500	221152	2	10,13
LWKSC600H100N	600	221162	2	11,27