

LZWMP...H50 45° Vertical Bend - Internal

Overview:

APPLICATION

Diversion in cable routing

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For joining fittings to cable tray lengths use Straight Connectors LZC...

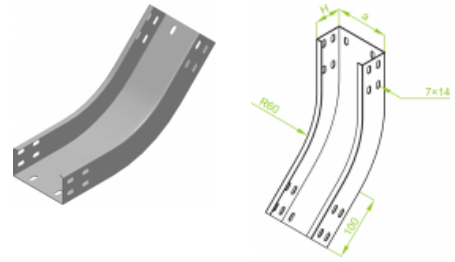

Versions:

Sheet thickness: **1,5 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-------------|--------------|------------------|-----------------|--------------|
| LZWMP50H50 | 50 | 352005 | 10 | 0,73 |
| LZWMP100H50 | 100 | 352010 | 10 | 0,85 |
| LZWMP200H50 | 200 | 352020 | 6 | 1,19 |
| LZWMP300H50 | 300 | 352030 | 4 | 1,54 |
| LZWMP400H50 | 400 | 352040 | 2 | 1,89 |
| LZWMP500H50 | 500 | 352050 | 1 | 2,25 |
| LZWMP600H50 | 600 | 352060 | 1 | 2,60 |

Connected products:

