

LZWMC...H50 45° Vertical Bend - Internal

Overview:

APPLICATION

Diversion in cable routing

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For joining fittings to cable tray lengths use Straight Connectors LZC...

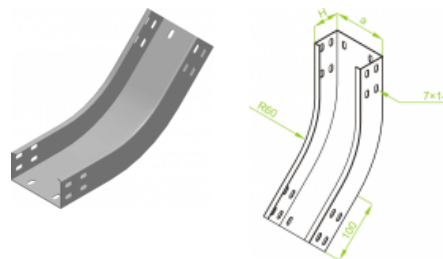

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LZWMC50H50	50	352105	20	0,98
LZWMC100H50	100	352110	20	1,12
LZWMC200H50	200	352120	10	1,58
LZWMC300H50	300	352130	4	2,05
LZWMC400H50	400	352140	2	2,52
LZWMC500H50	500	352150	2	3,00
LZWMC600H50	600	352160	2	3,47

Connected products:

