

LCC...H100 U-Shaped Connector

Overview:

APPLICATION

Connecting elements of cable runs

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For the installation use 20 sets of Screw SGF M8x14

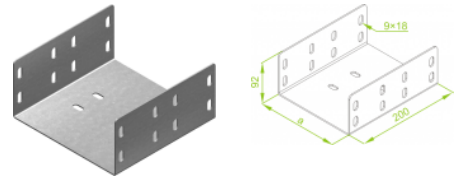

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LCC100H100	95	310510	10	0,96
LCC200H100	195	310520	10	1,28
LCC300H100	295	310530	4	1,60
LCC400H100	395	310540	4	1,92
LCC500H100	495	310550	2	2,24
LCC600H100	595	310560	2	2,56

Connected products:

