

LZWC...H100 90° Vertical Bend - Internal

Overview:

APPLICATION

Diversion in cable routing

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For joining fittings to cable tray lengths use Straight Connectors LZC...

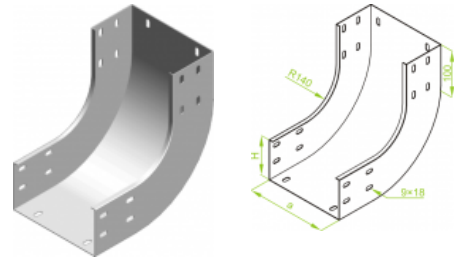

Versions:

Sheet thickness: **2,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-------------|--------------|------------------|-----------------|--------------|
| LZWC100H100 | 100 | 311910 | 6 | 2,26 |
| LZWC200H100 | 200 | 311920 | 6 | 3,01 |
| LZWC300H100 | 300 | 311930 | 4 | 3,61 |
| LZWC400H100 | 400 | 311940 | 4 | 4,28 |
| LZWC500H100 | 500 | 311950 | 2 | 4,96 |
| LZWC600H100 | 600 | 311960 | 2 | 5,62 |

Connected products:



KZWC...H100
Reinforced
Cable Tray



KZLC...H100
Cable Tray with
Integral
Connector



LZCH100
Straight
Connector



LZGCH100
Articulated
Connector



LCC...H100
U-Shaped
Connector



KKZC...H100 90°
Horizontal Bend



KKZMC...H100
45° Horizontal
Bend



TKZC...H100
Horizontal Tee



CZKZC...H100
Horizontal
Cross-over



LZZC...H100 90°
Vertical Bend -
External



LZZMC...H100
45° Vertical
Bend - External



LZWMC...H100
45° Vertical
Bend - Internal



TRZC...H100
Vertical Tee -
Lengthwise



RKZC...H100
Straight
Reducer