

KKZC...H200 90° Horizontal Bend

Overview:

APPLICATION

Diversion in cable routing

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For joining fittings to cable tray lengths use Straight Connectors LZC...

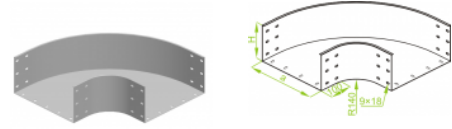

Versions:

Sheet thickness: **2,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-------------|--------------|------------------|-----------------|--------------|
| KKZC200H200 | 200 | 370720 | 4 | 4,52 |
| KKZC300H200 | 300 | 370730 | 4 | 7,17 |
| KKZC400H200 | 400 | 370740 | 2 | 9,82 |
| KKZC500H200 | 500 | 370750 | 2 | 12,17 |
| KKZC600H200 | 600 | 370760 | 2 | 14,80 |

Connected products:



KZC...H200
Cable Tray



KZLC...H200
Cable Tray with
Integral
Connector



LZCH200
Straight
Connector



LCC...H200
U-Shaped
Connector



LZGCH200
Articulated
Connector



KKZMC...H200
45° Horizontal
Bend



TKZC...H200
Horizontal Tee



CZKZC...H200
Horizontal
Cross-over



LZZC...H200 90°
Vertical Bend -
External



LZZMC...H200
45° Vertical
Bend - External



LZWC...H200
90° Vertical
Bend - Internal



LZWMC...H200
45° Vertical
Bend - Internal



TRZC...H200
Vertical Tee -
Lengthwise



RKZC...H200
Straight
Reducer