

PKZC... Cover

Overview:

APPLICATION

Protecting cables against damage. Tight cover protection against accumulation of dirt and dust.


Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

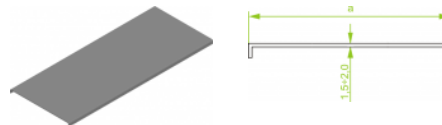

Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
PKZC50/2	2000	50	300305	10	1,15
PKZC50/3	3000	50	300405	10	1,15
PKZC100/2	2000	100	300310	6	1,97
PKZC100/3	3000	100	300410	6	1,97
PKZC200/2	2000	200	300320	4	3,62
PKZC200/3	3000	200	300420	4	3,62
PKZC300/2	2000	300	300330	4	5,27
PKZC300/3	3000	300	300430	4	5,27
PKZC400/2	2000	400	300340	2	6,92
PKZC400/3	3000	400	300440	2	6,92
PKZC500/2	2000	500	300350	2	8,56
PKZC500/3	3000	500	300450	2	8,56
PKZC600/2	2000	600	300360	2	10,21
PKZC600/3	3000	600	300460	2	10,21