


## DKD...H45N Cable Ladder

### Overview:

**Application**  
Cable routing

**Material**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**  
**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
**E-** stainless steel sections to 3m long (SS)  
**L-** powder coating in a full range of colours (PC)

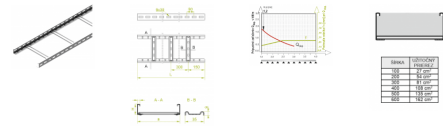

**NOTE: Cable ladder with rungs adapted for use with Cable Clamps UKZ**

**Available upon special order:**

- cable ladders 2m long
- cable ladders 150, 250mm wide.

### Versions:

Sheet thickness: 1,2 mm

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
DKD100H45/3N	3000	100	445110	4	1,71	2700
DKD100H45/6N	6000	100	445210	2	1,71	2700
DKD200H45/3N	3000	200	445120	4	1,94	5400
DKD200H45/6N	6000	200	445220	2	1,94	5400
DKD300H45/3N	3000	300	445130	4	2,17	8100
DKD300H45/6N	6000	300	445230	2	2,17	8100
DKD400H45/3N	3000	400	445140	2	2,51	10800
DKD400H45/6N	6000	400	445240	2	2,51	10800
DKD500H45/3N	3000	500	445150	2	2,62	13500
DKD500H45/6N	6000	500	445250	2	2,62	13500
DKD600H45/3N	3000	600	445160	2	2,85	16200
DKD600H45/6N	6000	600	445260	2	2,85	16200

### Connected products:

