


DKD...H45N Cable Ladder

Overview:

Application
Cable routing

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel sections to 3m long (SS)
L- powder coating in a full range of colours (PC)

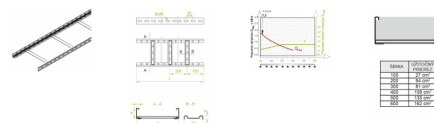

NOTE: Cable ladder with rungs adapted for use with Cable Clamps UKZ

Available upon special order:

- cable ladders 2m long
- cable ladders 150, 250mm wide.

Versions:

Sheet thickness: 1,2 mm

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
DKD100H45/3N	3000	100	445110	4	1,71	2700
DKD100H45/6N	6000	100	445210	2	1,71	2700
DKD200H45/3N	3000	200	445120	4	1,94	5400
DKD200H45/6N	6000	200	445220	2	1,94	5400
DKD300H45/3N	3000	300	445130	4	2,17	8100
DKD300H45/6N	6000	300	445230	2	2,17	8100
DKD400H45/3N	3000	400	445140	2	2,51	10800
DKD400H45/6N	6000	400	445240	2	2,51	10800
DKD500H45/3N	3000	500	445150	2	2,62	13500
DKD500H45/6N	6000	500	445250	2	2,62	13500
DKD600H45/3N	3000	600	445160	2	2,85	16200
DKD600H45/6N	6000	600	445260	2	2,85	16200

Connected products:

							
LDCH45N Straight Connector	LKDCH45N Angle Connector	LDDCH45N Articulated Connector - Attachable	LGCH45N Articulated Connector	LDP...H45N 90° Horizontal Bend	TDP...H45N Horizontal Tee	CZDP...H45N Horizontal Cross-over	LPDWP...H45N 90° Vertical Bend - Internal
							
LPDZP...H45N 90° Vertical Bend - External	LPDP...H45N Adjustable Vertical Bend	RDSP...H45N Straight Reducer	RDLP...H45N Left Reducer	RDPP...H45N Right Reducer	UKZ1/UKZO1... Cable Clamp	UKZ2... Cable Clamp	