


## DKC...H45N Cable Ladder

### Overview:

**Application**  
Cable routing

**Material**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**  
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
E- stainless steel sections to 3m long (SS)  
L- powder coating in a full range of colours (PC)

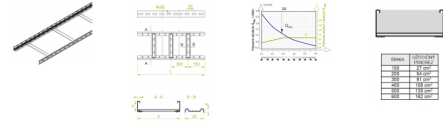

**NOTE: Cable ladder with rungs adapted for use with Cable Clamps UKZ**

**Available upon special order:**

- cable ladders 2m long
- cable ladders 150, 250mm wide.

### Versions:

Sheet thickness: 2,0 mm

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
DKC100H45/3N	3000	100	445710	4	2,74	2700
DKC100H45/6N	6000	100	445810	2	2,74	2700
DKC200H45/3N	3000	200	445720	4	3,10	5400
DKC200H45/6N	6000	200	445820	2	3,10	5400
DKC300H45/3N	3000	300	445730	4	3,48	8100
DKC300H45/6N	6000	300	445830	2	3,48	8100
DKC400H45/3N	3000	400	445740	2	4,02	10800
DKC400H45/6N	6000	400	445840	2	4,02	10800
DKC500H45/3N	3000	500	445750	2	4,20	13500
DKC500H45/6N	6000	500	445850	2	4,20	13500
DKC600H45/3N	3000	600	445760	2	4,57	16200
DKC600H45/6N	6000	600	445860	2	4,57	16200

### Connected products:



LDC...H45N 90° Horizontal Bend