

LDC...H45N 90° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section

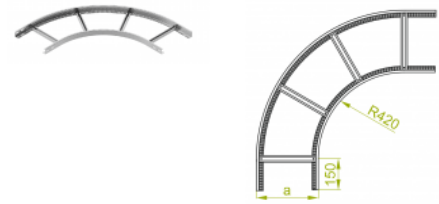

Versions:

Sheet thickness: **2,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-------------------|--------------|------------------|-----------------|--------------|
| LDC100H45N | 100 | 446910 | 2 | 3,39 |
| LDC200H45N | 200 | 446920 | 2 | 4,11 |
| LDC300H45N | 300 | 446930 | 2 | 4,83 |
| LDC400H45N | 400 | 446940 | 2 | 5,55 |
| LDC500H45N | 500 | 446950 | 2 | 6,27 |
| LDC600H45N | 600 | 446960 | 2 | 7,00 |