

## LPDC...H45N Adjustable Vertical Bend

### Overview:

**Application**

Diversion in cable routing

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

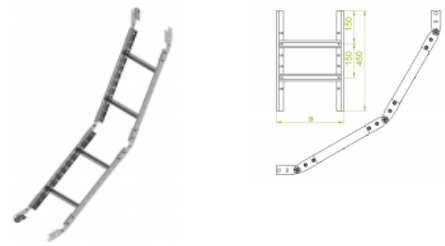

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDC100H45N	100	447710	2	4,45
LPDC200H45N	200	447720	2	4,94
LPDC300H45N	300	447730	2	5,47
LPDC400H45N	400	447740	2	6,23
LPDC500H45N	500	447750	2	6,48
LPDC600H45N	600	447760	2	7,00